


SPECIFICATIONS

LED hazardous area LIGHTING

THE Curator EXIT SIGN



linear EXIT SIGN light fixture



This reliable, highly visible linear light fixture identifies your mission-critical Exit within a hazardous area.

Designed with a Versatile mounting for positioning in any hazardous location work area.

- Petroleum Production
- Petroleum Loading & Storage
- Petroleum Transportation
- Retail Petroleum
- Paint Facilities
- Pumping Stations
- Metal Smelting
- Ocean Platform Facilities
- Ocean Platform Structures
- Foundry and Fabrication
- Mining Operations & Services
- Aerospace Clean Room
- Aerospace Production
- Chemical Production & Storage
- Ocean Vessel Operations
- Military Space Conditions
- Fine Particle Production & Storage
- Food & Distilling Production
- Electrical Power Generation
- Electrical Power Stations



120 - 277 Universal Voltage



SPECIFICATIONS

ELECTRICAL

WATTAGE	36, 48, 56
INPUT VOLTAGE	120-277 vAC
POWER FACTOR	>0.98
SURGE PROTECTION	5kV

OPTICAL

LUMENS / WATT	110+
CCT / KELVIN	3000K, 4000K, 6000K
CRI	>80
LED MANUFACTURE	OSRAM/SEOUL

PHYSICAL

ACCESS (NPT)	M20, M25, NPT 3/4
COLOR	Grey OR Custom Color (RAL)
COATING	Epoxy Powder Coating
FIXTURE BODY	Copper Free Aluminum Alloy
LENS	Tempered Glass

MOUNTING

Surface Mount Pivot Bracket
Pipe Clamp / Clamp Mount / Loop Mount
2XNPT 3/4" (M25 Optional)

Access Connections



If button is unresponsive, the link may be changing or in revision.

PRODUCT SELECTION

CATALOG NUMBER	NAME	DESCRIPTION	WATTAGE	KELVIN	VOLTAGE	LUMENS	LENS	LUMENS/WATT
HKL2-018-60-U-X-XX	The Curator Exit Sign	2 ft Linear HazLoc	18	6K	120-277	2,100	Glass	110+
HKL2-036-60-U-X-XX	The Curator Exit Sign	2 ft Linear HazLoc	36	6K	120-277	4,000	Glass	110+
HKL2-048-60-U-X-XX	The Curator Exit Sign	2 ft Linear HazLoc	48	6K	120-277	5,400	Glass	110+

PRODUCT ORDER SELECTION

HKL2 - [] - [] - U - [] - []


Series HKL2	Type-Watts <input type="checkbox"/> 018-18 Watts <input type="checkbox"/> 036-36 Watts <input type="checkbox"/> 048-48 Watts	Kelvin <input type="checkbox"/> 60 - 6000K	Voltage <input type="checkbox"/> U-120-277v	Mounting Options <input type="checkbox"/> HKBR - Bracket <input type="checkbox"/> HKCM - Clamp Mount <input type="checkbox"/> HKPC - Pipe Clamp <input type="checkbox"/> HKSP - Surface Mount Pivot Bracket <input type="checkbox"/> M25 - Cable Entry	Directional Arrow Code <input type="checkbox"/> EL - Exit Left <input type="checkbox"/> ER - Exit Right <input type="checkbox"/> ED - Exit Down
-----------------------	--	--	---	--	---

Specifications and data are subject to change without notice.


LED hazardous area LIGHTING

THE Curator EXIT SIGN MOUNTING



120 - 277 Universal Voltage

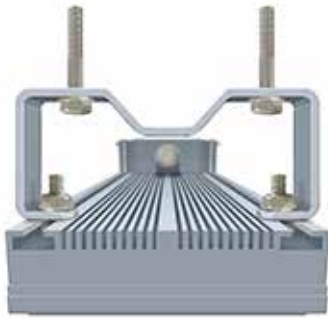

Bracket
HKBR

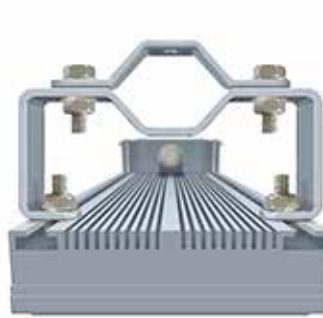

Pipe Clamp
HKPC

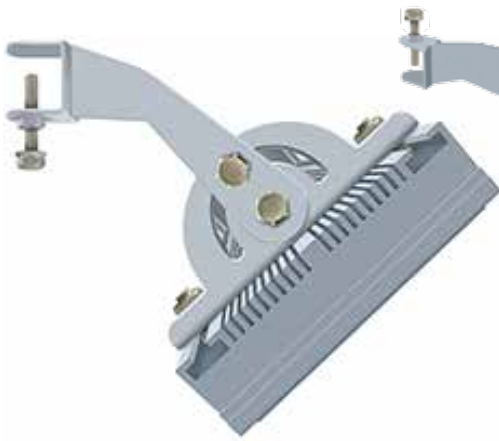

Clamp Mount
HKCM



Surface Mount Pivot Bracket
HKSP



DIMENSIONS & WEIGHT RANGE



23.6" L x 5.3" W x 3.3" H

2 ft. - 14.1 lbs.



Specifications and data are subject to change without notice.