

# The PATROLLER Series Hazardous Location Lighting

## HJAS2

120-277vAC / 347-480vAC

Cat. #	Type
Notes	

### DESIGNATIONS



### KEY FEATURES AND BENEFITS

- Three sizes adaptable for lighting large to medium surface areas.
- Class I Division 2 - Groups A, B, C, D (Flammable Gases & Vapors).
- Class II Division 1 & 2 - Groups E, F, G (Combustible Dusts).
- Class III Divisions 1 & 2.
- Ambient temperature capabilities: -40°C to 40°C (104°F).
- Corrosion proof – Coated aluminum alloy (copper free) housing.
- Gray nylon corrosion resistant powder coat.
- High vibration resistance.
- Marine and wet location ready.



### SPECIFICATIONS

<b>NAME</b>	The Patroller
<b>Category</b>	Hazardous Area Flood Light
<b>Model #</b>	HJAS2
<b>Voltage</b>	120 - 277vAC or 347 - 480vAC
<b>Ambient Temperatures</b>	-40° to 40°C (104°F)
<b>T – Rating</b>	T3
<b>Housing</b>	Coated Copper Free Aluminum Alloy
<b>Color</b>	Gray
<b>Lens</b>	Flat Tempered Glass
<b>Wattage</b>	20 w / 40w / 60w / 80w / 100w 120w / 150w / 180w / 200w / 250w
<b>Efficacy</b>	140 lm/w
<b>Lifetime</b>	70,000 hr. at L70
<b>CRI</b>	>70 cool white
<b>Beam Angle</b>	40°, 60°, 90°, 120°
<b>Power Factor</b>	>0.90
<b>Color Temp</b>	4000 & 5000 Kelvin

<b>Weight</b>	35.5 lbs. / 30.175 lbs. / 24.60 lbs.
<b>Dimensions</b>	15" w x 9.1" h / 12.6" w x 9.4" h / 10.4" w x 6.3" h
<b>NPT</b>	3/4"
<b>Warranty</b>	5-Year Limited

20 watts	2,800 Lumens
40 watts	5,600 Lumens
60 watts	8,400 Lumens
80 watts	11,200 Lumens
100 watts	14,000 Lumens
120 watts	16,800 Lumens
150 watts	19,500 Lumens
180 watts	25,200 Lumens
200 watts	26,000 Lumens
250 watts	32,500 Lumens

### PRODUCT ORDERING SELECTION

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>Series</b>	<b>Type-Watts</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Beam Angle</b>	<b>Mounting Options</b>
HJAS2	<input type="checkbox"/> 020 - 20 Watts <input type="checkbox"/> 120 - 120 Watts <input type="checkbox"/> 040 - 40 Watts <input type="checkbox"/> 150 - 150 Watts <input type="checkbox"/> 060 - 60 Watts <input type="checkbox"/> 180 - 180 Watts <input type="checkbox"/> 080 - 80 Watts <input type="checkbox"/> 200 - 200 Watts <input type="checkbox"/> 100 - 100 Watts <input type="checkbox"/> 250 - 250 Watts	<input type="checkbox"/> 50 - 5000K <input type="checkbox"/> 40 - 4000K	<input type="checkbox"/> U - 120 - 277v <input type="checkbox"/> 48 - 347- 480v	<input type="checkbox"/> 40 - 40° <input type="checkbox"/> 60 - 60° <input type="checkbox"/> 90 - 90° <input type="checkbox"/> 120 - 120° (Standard)	<input type="checkbox"/> HJUB - Universal Bracket <input type="checkbox"/> HJPP - Pendant Pipe

# The PATROLLER Series HazLoc


## HJAS2

120-277vAC / 347-480vAC


### MOUNTING



Pendant Mount - #HJPP

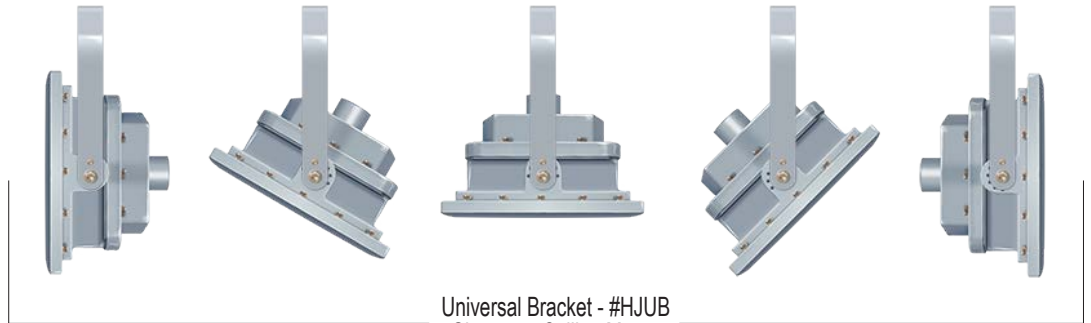


Universal Bracket - #HJUB  
Shown as Ceiling Mount

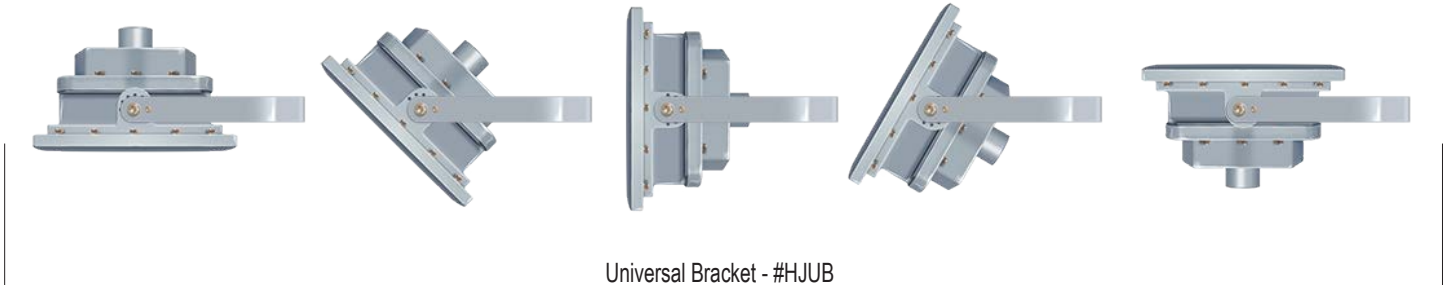

Universal Bracket - #HJUB  
Shown as Wall Mount

### DIMENSIONS

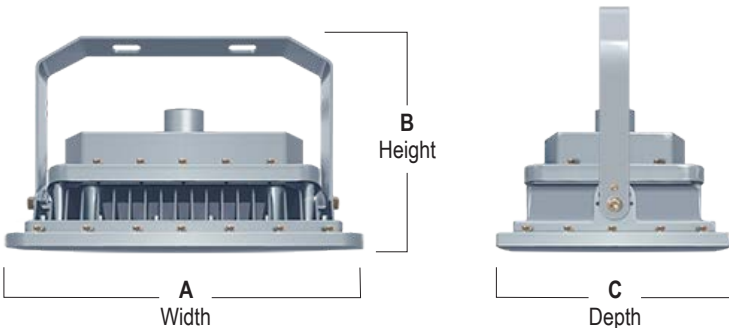

A Width	B Height	C Depth	Wattages
10.4"	6.3"	8.1"	20w / 40w / 60w
12.6"	9.4"	6.5"	80w / 100w
15"	9.1"	10.6"	120w / 150w / 200w / 250w

### PRODUCT DESIGNATIONS



Learn More About Class / Division with a Button Click.

