

## The REACHER Series Dock Lighting

### DLYL

120 - 277vAC

Cat. #	Type
Notes	



60" Double Swing  
Pivot Arm  
# DSPA60



40" Single  
Swing Arm  
# SSA40S

### DESIGNATIONS



**IP65**

Accomplishes OSHA standard 1910

### KEY FEATURES AND BENEFITS

- Heavy-Duty design built with rugged components.
- Designed to withstand harsh loading dock environments.
- Easily positions to provide exceptional light inside entire length of trailer.
- Accomplishes OSHA standard 1910 requiring loading docks to be lighted.
- Features a powdercoat finish in "Safety Yellow", standard.
- Built-in heat dissipation - always cool-to-the-touch.
- On/Off Switch on back of lamp.
- Twist Knobs for lamp pivoting and lamp turning.
- Wire Guard standard.



8" Lamp  
50 Watts



6" Lamp  
20 Watts / 30 Watts

### SPECIFICATIONS

<b>Wattages</b>	20, 30, 50
<b>Input Voltages</b>	120-277vAC
<b>Lumen Range</b>	2,200 to 6,000
<b>Lumens per Watt</b>	110 to 120 lm/w
<b>Power Factor</b>	>0.90
<b>CCT/ KELVIN</b>	4000K, 5000K
<b>CRI</b>	>80
<b>Beam Angle</b>	90°
<b>Body Material</b>	Aluminum

<b>Color</b>	Safety Yellow Powdercoat
<b>Lens</b>	Tempered Glass (Std)
<b>Ambient Temperature</b>	-22°C to 45°C (113°F)

Model #	Wattage	Lumens	Efficacy	Lamp Size
DLYL-020	20w Lamp	2,200	110 lm/w	6" Diameter
DLYL-030	30w Lamp	3,300	110 lm/w	6" Diameter
DLYL-050	50w Lamp	6,000	120 lm/w	8" Diameter

**NOTE:** Mounting Arm configurations are selected separately (see page 2).

### PRODUCT ORDERING SELECTION

DLYL -  -  - U -  -

<b>Series</b>	<b>Wattage</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Beam Angle</b>	<b>Mounting Arm Configurations</b>
DLYL	<input type="checkbox"/> 020 - 20 Watts <input type="checkbox"/> 030 - 30 Watts <input type="checkbox"/> 050 - 50 Watts	<input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> U-120-277	<input type="checkbox"/> 90 - 90° Angle	<input type="checkbox"/> SSA40S - 40" Single Swing Arm / Square Mount Plate <input type="checkbox"/> DSPA60 - 60" Double Swing Pivot Arm / H Mount Plate



All items listed are **IN STOCK**.  
30 watt lamp available in 5000K only.  
Contact factory for inventory levels.

# LED


## The REACHER Series Dock Light

### DLYL


120 - 277vAC

### MOUNTING / OPTIONS / DETAILS


40" Single Swing Arm with Square Mounting Plate

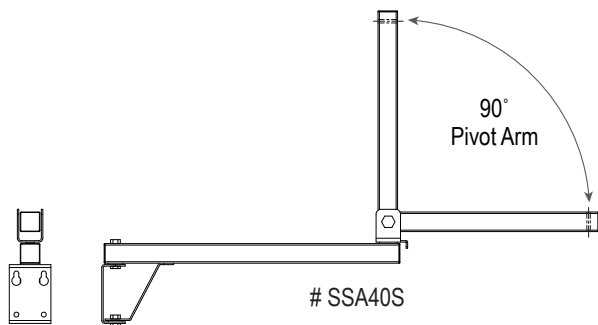

6" or 8" Lamp Sizes Fits Both Arm Configurations

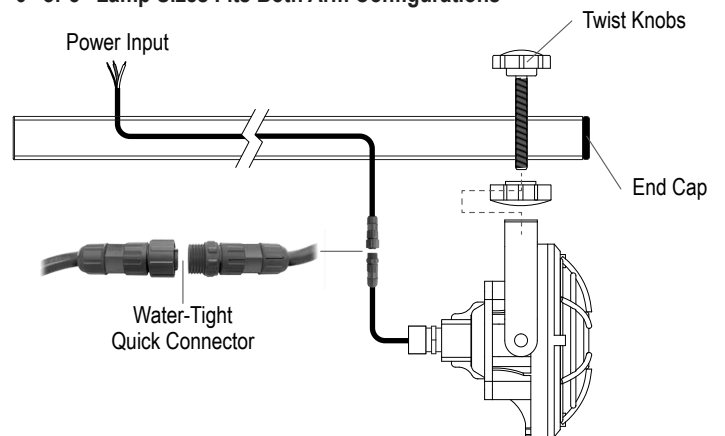


60" Double Swing Pivot Arm with "H" Mounting Plate

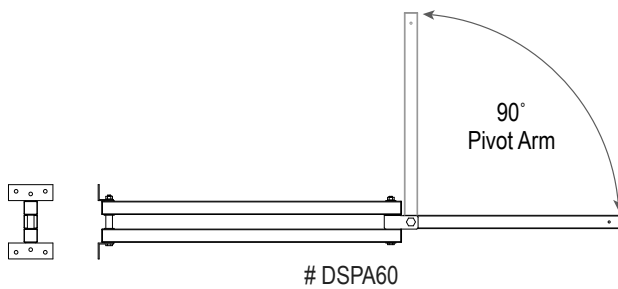


### DIMENSIONS

8" Lamp - 40 / 50 watts

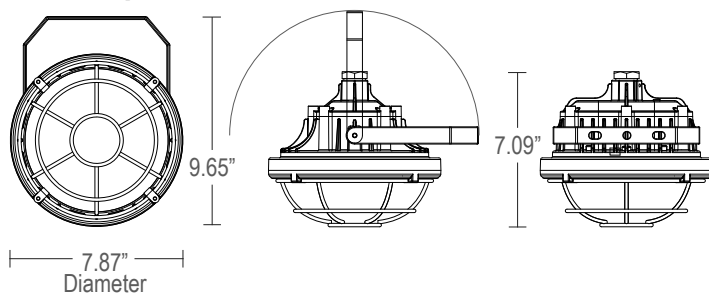

6" Lamp - 20 / 30 watts

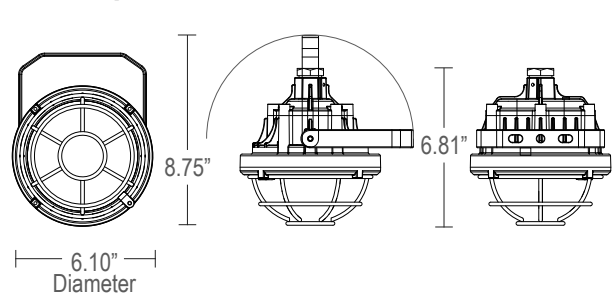

Specifications and data are subject to change without notice.

### PRODUCT DESIGNATIONS



IP65

Accomplishes OSHA standard 1910

