

CLASSIC VAPOR TIGHT Linear Bay Lighting

SV2 / SV4 / SV8

120 - 277vAC / 347 - 480vAC

IP65 **IP66** **IP67**



Cat. #	Type
Notes	

DESIGNATIONS



KEY FEATURES AND BENEFITS

- UL 5VA Fiberglass housing will not melt or burn.
- Housing features poured-in-place gaskets.
- 120-277V and 347-480VAC Multivolt 0-10V Dimmable Drivers.
- Wash down design protects your lights in demanding environments.
- Entry holes are 7/8" diameter with water-tight rubber plug.
- Stainless steel hardware (Tamper Resistant SS Screws Available).
- High impact resistant acrylic lenses in Clear or Frosted, Smooth or Ribbed.
- Ceiling mounts allow 1.25" space for heat dissipation and air flow.

Ideal for parking garages, cold storage, marinas, barns, canopies, car washes, poultry farms, agricultural applications and other corrosive and wet areas.

SPECIFICATIONS

Name	The Classic Vapor Tight Bay Light
Category	Linear and Bay Lighting
Model	#SV2 / SV4 / SV8
Color	White
Housing	UL 5VA Fiberglass
Voltage	120-277vAC / 347-480vAC
Ambient Temp	-30°C (-22°F) to +45°C (115°F)
Lens	Acrylic Clear / Frosted / Smooth / Ribbed
Beam Angles	60°, 90° or 120°
IP Rating	IP65 / IP66 / IP67
Wattage	28w / 35w / 48w / 57w / 72w / 84w 97w / 114w / 144w / 168w
Efficacy	Up to 120 Lumens per Watt
Lifetime	93,000 hr. at L70

CRI	84+
Color Temp	3000K, 3500K, 4000K, 5000K
Sizes / Weight	51.75" W x 3.92" H / 4.2" D
Warranty	5-Year Limited

Item	Wattage	Lumens	Item	Wattage	Lumens		
2 Foot	SV2-28	24W	2,700lm	8 Foot	SV8-48	48W	5,570lm
	SV2-35	35W	4,200lm		SV8-70	70W	9,000lm
4 Foot	SV4-35	35W	4,500lm		SV8-97	97W	11,140lm
	SV4-48	48W	5,570lm		SV8-114	114W	13,580lm
	SV4-57	57W	6,790lm		SV8-144	144W	17,000lm
	SV4-72	72W	8,500lm		SV8-168	168W	20,000lm
	SV4-84	84W	10,000lm				

PRODUCT ORDERING SELECTION

Series	Wattage	Voltage	Lens Material	Lens	Kelvin	Options and Mounting Accessories	
SV2	<input type="checkbox"/> 028 - 28W	<input type="checkbox"/> DMV - 120-277VAC Multivolt 0-10V Dimmable	<input type="checkbox"/> A - High Impact Acrylic (Standard)	<input type="checkbox"/> RF - Ribbed Frosted	<input type="checkbox"/> 30-3000K	<input type="checkbox"/> OS - Sensor only	
	<input type="checkbox"/> 035 - 35W						<input type="checkbox"/> P - Polycarbonate (Option)
SV4	<input type="checkbox"/> 035 - 35W	<input type="checkbox"/> DHV - 347-480VAC Multivolt 0-10V Dimmable	<input type="checkbox"/> SF - Smooth Frosted	<input type="checkbox"/> 40-4000K	<input type="checkbox"/> 50-5000K	<input type="checkbox"/> SS - Internal Microwave OCC Sensor	
	<input type="checkbox"/> 048 - 48W						<input type="checkbox"/> EM - 10 Watt ~ 1300 lm
	<input type="checkbox"/> 057 - 57W						
SV8	<input type="checkbox"/> 072 - 72W	<input type="checkbox"/> 114 - 114W <input type="checkbox"/> 144 - 144W <input type="checkbox"/> 168 - 168W	<input type="checkbox"/> SC - Smooth Clear	<input type="checkbox"/> VHM - V-Hook for Classic Mount	<input type="checkbox"/> SSL - Stainless Steel Latches	<input type="checkbox"/> WD - Wide Distribution (parking garages)	
	<input type="checkbox"/> 084 - 84W						
	<input type="checkbox"/> 048 - 48W						
	<input type="checkbox"/> 097 - 97W						


See page 2 for cord and whip options and mounting accessories

CLASSIC VAPOR TIGHT Linear Bay


SV2 / SV4 / SV8

120 - 277VAC / 347 - 480VAC


MOUNTING




Stainless Steel Mounting Bracket
CMBN (standard)

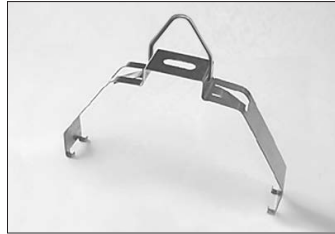

Stainless Steel Mounting Bracket
with Bail # VHM

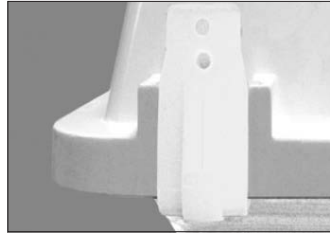


White Polycarbonate Latches
(Standard)

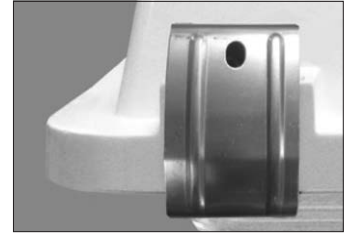

Stainless Steel Latches
SSL (Option)




45° Mounting Bracket
MB45

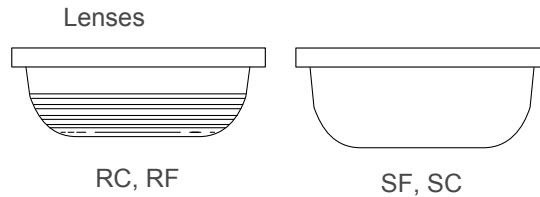

Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP – Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK – Black	(Blank) 120-277V	15 - 15 Amps
CS – Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH – White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
	15 - 15 feet				480 - 480V	

DIMENSIONS

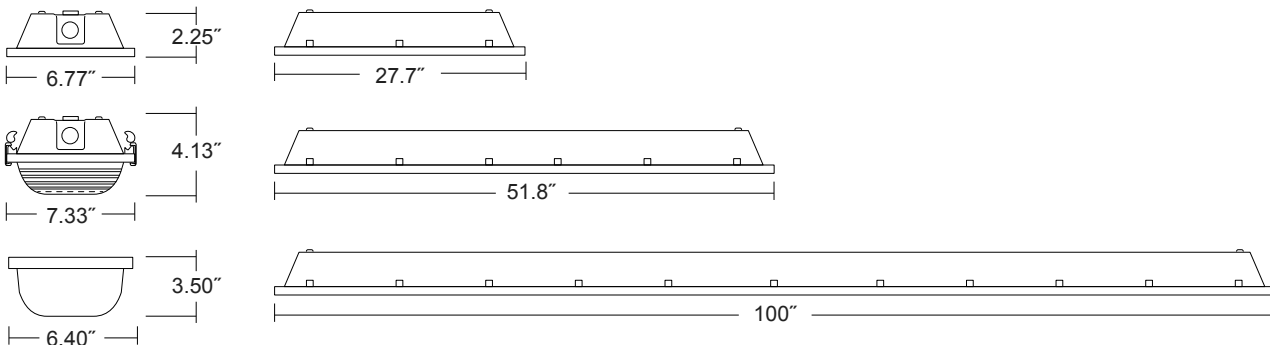

Specifications and data are subject to change without notice.

PRODUCT DESIGNATIONS

