

NARROW VAPOR TIGHT Linear Bay Lighting

SVN4

120 - 277vAC / 347 - 480vAC

IP65 **IP66** **IP67**



Cat. #	Type
Notes	

DESIGNATIONS



KEY FEATURES AND BENEFITS

- UL 5VA Fiberglass housing will not melt or burn.
- Housing features poured-in-place gaskets.
- 120-277V and 347-480VAC Multivolt 0-10V Dimmable Drivers.
- Wash down design protects your lights in demanding environments.
- Entry holes are 7/8" diameter with water-tight rubber plug.
- Very durable and easy to clean with captive latch design.
- Stainless steel hardware (Tamper Resistant SS Screws Available).
- High impact resistant acrylic lenses in Clear or Frosted, Smooth or Ribbed.

Ideal for parking garages, cold storage, marinas, barns, canopies, car washes, poultry farms, agricultural applications and other corrosive and wet areas.

SPECIFICATIONS

Name	The Narrow Vapor Tight Bay Light
Category	Linear and Bay Lighting
Model	#SVN4
Color	White
Housing	UL 5VA Fiberglass
Voltage	120-277vAC / 347-480vAC
Ambient Temperature	-30°C (-22°F) to +45°C (115°F)
Lens	Acrylic Clear / Frosted / Smooth / Ribbed
Beam Angles	60°, 90° or 120°
IP Rating	IP65 / IP66 / IP67
Wattage	24w / 35w / 42w / 48w / 55w
Efficacy	Up to 120 Lumens per Watt

Lifetime	60,000 hr. at L70
CRI	84+
Color Temp	3000K, 3500K, 4000K, 5000K
Sizes / Weight	51.75" W x 3.92" H / 4.2" D
Warranty	5-Year Limited

Item	Wattage	Lumens
SVN4-24	24W	2,800lm
SVN4-35	35W	4,100lm
SVN4-42	442W	5,600lm
SVN4-48	48W	5,600lm
SVN- 4-55	55W	6,400lm

PRODUCT ORDERING SELECTION

SVN4						
Series	Wattage	Voltage	Lens Material	Lens	Kelvin	Options and Accessories
SVN4 (4 Feet)	<input type="checkbox"/> 024 - 24W <input type="checkbox"/> 035 - 35W <input type="checkbox"/> 042 - 42W <input type="checkbox"/> 048 - 48W <input type="checkbox"/> 055 - 55W	<input type="checkbox"/> DMV - 120-277vAC Multivolt 0-10V Dimmable	<input type="checkbox"/> A - High Impact Acrylic (Standard) <input type="checkbox"/> P - Polycarbonate (Option)	<input type="checkbox"/> RF - Ribbed Frosted <input type="checkbox"/> RC - Ribbed Clear <input type="checkbox"/> SF - Smooth Frosted <input type="checkbox"/> SC - Smooth Clear	<input type="checkbox"/> 30-3000K <input type="checkbox"/> 35-3500K <input type="checkbox"/> 40-4000K <input type="checkbox"/> 50-5000K	<input type="checkbox"/> OS - Sensor only <input type="checkbox"/> OSC - Cold Location <input type="checkbox"/> SS - Internal Microwave OCC Sensor <input type="checkbox"/> EM - 10 Watt ~ 1300 lm <input type="checkbox"/> CMB - Ceiling Mount (2) <input type="checkbox"/> SSL - Stainless Steel Latches <input type="checkbox"/> VHMN - V-Hook for Narrow Mount <input type="checkbox"/> OSW - Wet Location <input type="checkbox"/> OSD - Sensor / 0-10V Dimming


See page 2 for cord and whip options and mounting accessories.

NARROW VAPOR TIGHT Linear Bay


SVN4

120 - 277VAC / 347 - 480VAC


MOUNTING




Stainless Steel Mounting Bracket
CMBN (standard)



Stainless Steel Mounting Bracket
with Bail # VHMN




White Polycarbonate Latches
(Standard)

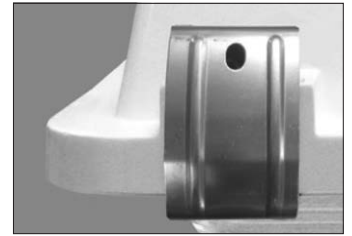

Stainless Steel Latches
SSL (Option)

Lenses



RC, RF



SF, SC


Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP – Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK – Black	(Blank) 120-277V	15 - 15 Amps
CS – Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH – White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
	15 - 15 feet				480 - 480V	

DIMENSIONS




4.00"




4.08"

4.20"



3.92"



51.75"

PRODUCT DESIGNATIONS

