

# COMBO WET LOCATION LED Exit Sign & Lighting

**CESNN**

120 - 277vAC



Cat. #	Type
Notes	


## DESIGNATIONS



## KEY FEATURES AND BENEFITS

- Two fully adjustable, bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.
- High Pressure Wash Down Rated.

## DIMENSIONS

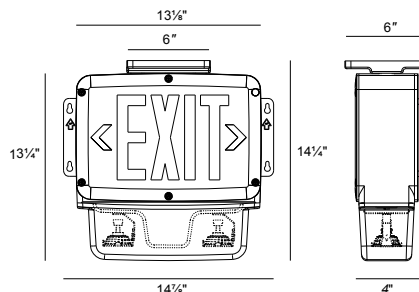

## SPECIFICATIONS

### ELECTRICAL

- Dual 120/277 voltage.
  - Unique bi-color LED indicator light alerts occupant on battery condition).
  - Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
  - 6V/12V maintenance-free, rechargeable NiCd battery (12W, 15W).
  - 6V/12V maintenance-free, rechargeable sealed lead acid battery (28W).
- Offers 4.8W, 7.8W, 20.8W of remote capacity (6V/12V DC output) standard on the 12W, 15W and 28W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
  - Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

### HOUSING

- Housing is reinforced polycarbonate in white, gray or black.
- Knockout's provided for conduit feed applications.

- Corrosion-resistant one piece, high impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual and annual tests for reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access.
- NH: No lamp heads attached to the unit enabling it to be used as remote capable EXIT sign.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing.
- NiCd battery prorated for five years.
- Lead Acid batteries prorated for two years.

### CERTIFICATIONS

- IP66 Rated, Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NEMA4X Rated and UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

## PRODUCT ORDERING SELECTION

CESNN						
<b>Model</b>	<b>Faces</b>	<b>Letter Color</b>	<b>Voltage</b>	<b>Wattage</b>	<b>Housing Color</b>	<b>Options</b>
CESNN	<input type="checkbox"/> 1 - Single Face (15W & 28W only) <input type="checkbox"/> 2 - Double Face (12W only)	<input type="checkbox"/> R - Red <input type="checkbox"/> G - Green	<input type="checkbox"/> 6 - 6 volts <input type="checkbox"/> 12 - 12 volts	<input type="checkbox"/> 12 - 12 watts <input type="checkbox"/> 15 - 15 watts <input type="checkbox"/> 28 - 28 watts	<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	<input type="checkbox"/> SDT - Self-Diagnostic (Battery Backup only) <input type="checkbox"/> CW - Cold Weather <input type="checkbox"/> TP - Tamper-Proof <input type="checkbox"/> NH - No Heads

