

WET LOCATION LED Exit Sign

ESNN

120 - 277vAC



Cat. #	Type
Notes	


DESIGNATIONS



KEY FEATURES AND BENEFITS

- Ultra-bright, energy efficient, long life Red or Green LEDs.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.

DIMENSIONS

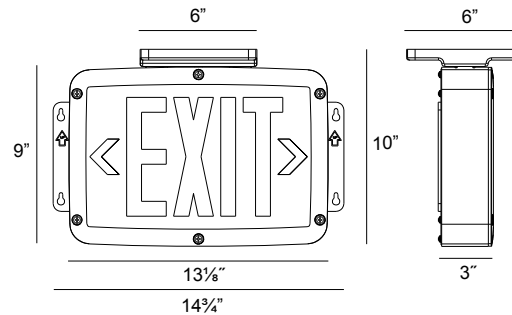

SPECIFICATIONS

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

HOUSING

- Housing is reinforced polycarbonate in white, gray or black.
- Corrosion-resistant one piece, high impact resistant, UV stabilized

polycarbonate lens and molded gasket with stainless steel screws.

- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual and annual tests for reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access.

WARRANTY / LISTING

- Five year warranty on all electronics and housing.
- Battery prorated for five years.

CERTIFICATIONS

- IP66 Rated, Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NEMA4X Rated and UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

PRODUCT ORDERING SELECTION

ESNN					
Model	Faces	Letter Color	Housing Color	Battery	Options
ESNN	<input type="checkbox"/> 1 - Single Face <input type="checkbox"/> 2 - Double Face	<input type="checkbox"/> R - Red <input type="checkbox"/> G - Green	<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	<input type="checkbox"/> (Blank) - 120-277vAC only <input type="checkbox"/> EM - Battery Backup (Cold Weather Standard)	<input type="checkbox"/> SDT - Self-Diagnostic (Battery Backup only) <input type="checkbox"/> 2C - Dual Circuit Operation (AC only) <input type="checkbox"/> TP - Tamper-Proof