

The MARINER 4 Series Linear Lighting

LQH4

120 - 277vAC / 347 - 480vAC

Cat. #	Type
Notes	



DESIGNATIONS



KEY FEATURES AND BENEFITS

- Heavy-Duty Die Cast Aluminum Housing.
- Tapped Conduit Entry All Four Sides.
- Gray Powdercoat Finish Over a Chromate Conversion Coating.
- Clear or Opal Polycarbonate Vandal-Resistant Lens.
- Natatorium approved.
- Easy installation and maintenance.
- Also available as Class 1 Div 2 Hazardous Location.
- Sensors options available.

SPECIFICATIONS

Name	The Mariner 4
Category	Linear for Harsh Environments
Model	#LQH4
Color	Gray
Housing	Die-Cast Aluminum
Voltage	120-277vAC / 347-480vAC
Ambient Temperature	Ambient -40°C to 50°C (122°F)
Lens	Clear Polycarbonate Vandal Resistant (standard) Opal Polycarbonate Vandal Resistant
IP Rating	IP66
Wattage	126w / 152w

Efficacy	102 to 126 Lm/W
Lifetime	100,000 hr. at L ₇₀
CRI	Ra≥80
Power Factor	>0.992
Color Temp (Kelvin)	4000, 5000 Kelvin
Dimensions	49"W x 7.1"H x 4.25"D
Warranty	5-Year Limited

Item	Wattage	Voltage	Clear Lens	Opal Lens
LQH4-126	126 Watts	120-277 / 347-480	16,287 Lm	13,720 Lm
LQH4-152	152 Watts	120-277 / 347-480	19,773 Lm	16,594 Lm

PRODUCT ORDERING SELECTION


LQ	H4					GR		
Series	Type-Watts	Wattage	Kelvin	Lens	Voltage	Color	Mounting Options	Other Options
LQ	<input type="checkbox"/> H4 - Harsh 4 ft.	<input type="checkbox"/> 126 - 126 Watts <input type="checkbox"/> 152 - 152 Watts	<input type="checkbox"/> 50 - 5000K (Std) <input type="checkbox"/> 40 - 4000K	<input type="checkbox"/> PC - Clear Polycarbonate <input type="checkbox"/> LPC - Opal Polycarbonate	<input type="checkbox"/> U - 120-277 <input type="checkbox"/> 48 - 347-480	<input type="checkbox"/> GR - Gray	<input type="checkbox"/> QM - Quick Mount <input type="checkbox"/> YK - Yoke <input type="checkbox"/> PV - Pivot Mount	<input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> SF - Single Fuse <input type="checkbox"/> DF - Double Fuse

The MARINER 4 Series Linear

LQH4

120 - 277vAC / 347 - 480vAC

MOUNTING




Stainless Steel
Quick Mount Bracket # QM




Stainless Steel
Yoke # YK


Stainless Steel
Pivot Mount
PV

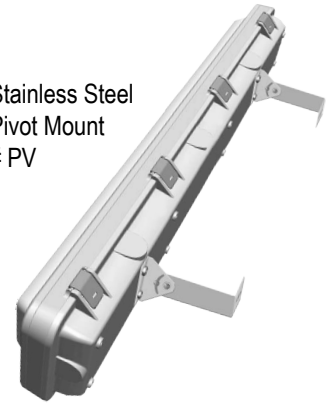

DIMENSIONS

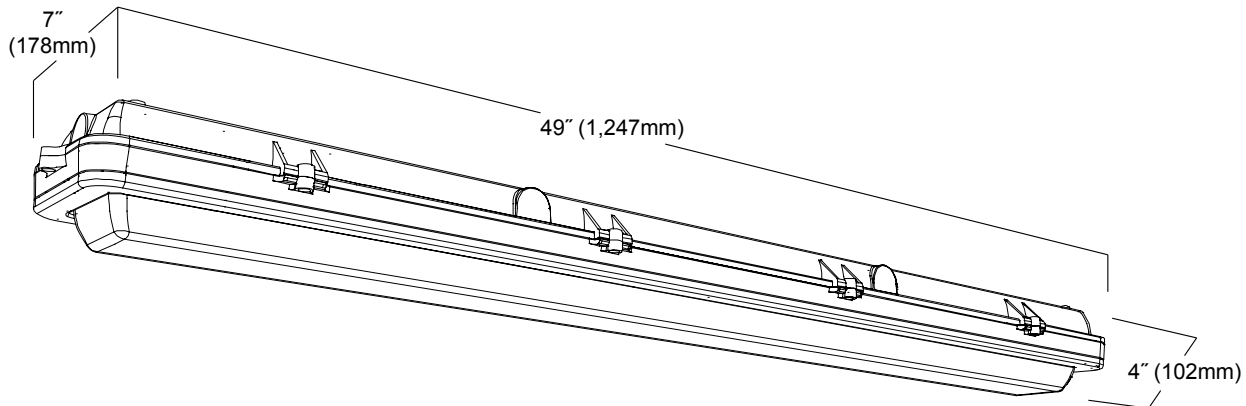

PRODUCT DESIGNATIONS



Specifications and data are subject to change without notice.

