

LED

ROUND STAINLESS STEEL BOLLARDS with Dome Top

BQDS

120 - 277vAC



Cone Reflector



Round Louver

Cat. #	Type
Notes	

DESIGNATIONS



IP67



KEY FEATURES AND BENEFITS

These durable, stainless steel round dome topped LED Bollards are designed and produced to provide uniform ambient lighting while accenting any landscape or location.

This round bollard provides low glare to a wide area and compared to HID bollard lighting, is truly cost-effective pathway lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

Custom heights are available upon request.

SPECIFICATIONS

Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Internal Ballast Tray for Easy Maintenance.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750, IP65 Sealed LED Compartment.

Finish:

Textured Powdercoat Over Chromate Conversion Coating. Custom Colors Available Upon Request.

Styles:

IES Type III or V Clear Prismatic Borosilicate Glass Refractor, Specially Designed Aluminum Cone Reflector or Internal Louvers

Lens: Clear Polycarbonate Vandal-Resistant Lens

LED: Aluminum Boards

Wattage: Array: 14.5w, System: 17w (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60H; 347V, 50/60H; Dimmable Driver

Mounting Options:

Mounting Kit with 8-inch Anchor Bolts, Included.

Height: 42 1/4"

Weight: Type III & Type V - 25 lbs.
VRL - 23 lbs. / VCR - 22 lbs.

Operating Temperature: -40°C to +40°C

5-Year Warranty

Item	Wattage	Voltage	Kelvin	Cone Lm	Louvre Lm
BQDS-015-30-X-U	15w	120-277v	3000K	1,033 lm	730 lm
BQDS-015-40-X-U	15w	120-277v	4000K	1,120 lm	791 lm
BQDS-015-50-X-U	15w	120-277v	5000K	1,167 lm	824 lm
BQDS-015-AM-X-U	15w	120-277v	AMBER		

Note: Includes Mounting kit with 8" anchor bolts)

PRODUCT ORDERING SELECTION

BQDS	015			U	SS	
Series	Wattage	Kelvin	Lens	Voltage	Body Color	Options / Accessories
BQDS	<input type="checkbox"/> 015 - 15 Watts	<input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K <input type="checkbox"/> AM - Amber	<input type="checkbox"/> III - Type III <input type="checkbox"/> V - Type V <input type="checkbox"/> VRL - Type V Louvers <input type="checkbox"/> VCR - Type V Cone	<input type="checkbox"/> U - 120-277vAC	<input type="checkbox"/> SS - Stainless Steel	<input type="checkbox"/> SF - Single Fuse <input type="checkbox"/> DF - Double Fuse <input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> GF1 - GFCI Outlet / 15A / 120vAC <input type="checkbox"/> BU - Battery Backup, 90 Minutes <input type="checkbox"/> BRK - Universal Retrofit Base Kit



LED

ROUND STAINLESS STEEL BOLLARDS with Dome Top

BQDS

120 - 277vAC

MOUNTING





Universal Retrofit Base Kit

Fits all 7" and 4" bollards

#BRK


PHOTOMETRIC OUTPUT

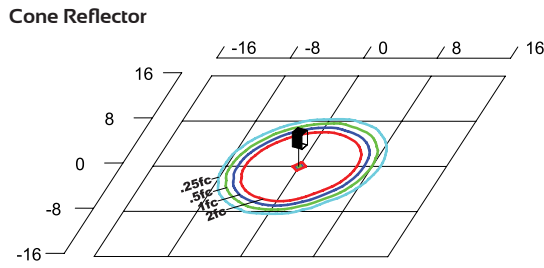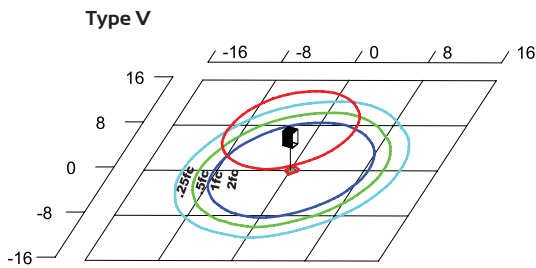

Grid in feet, Mounting Height = 3.5 ft.

Grid in feet, Mounting Height = 3.5 ft.

DIMENSIONS

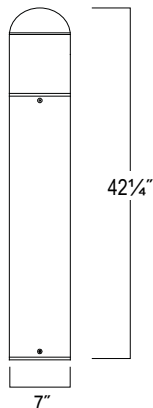

Custom Heights Available Upon Request.

PRODUCT DESIGNATIONS

