



SQUARE DESIGNER BOLLARD with Reveal

BQRS

120 - 277vAC



Cat. #	Type
Notes	

DESIGNATIONS



IP67



KEY FEATURES AND BENEFITS

This durable LED Bollards are designed and produced to provide uniform ambient lighting while accenting any landscape. This square bollard with a flat top provides low glare and cost-effective pathway lighting for any location.

Solas Ray Designer Bollards become the featured addition to illuminate and accent landscaping, walkways, buildings, hospitals, office buildings, schools and parking areas. Anywhere security, visibility and safety is needed, ask for quality, demand performance and expect reliability from Solas Ray bollards.

SPECIFICATIONS

Housing:
Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Sealed Driver Compartment.

Lens:
Clear Inner Lens to Seal LED Array.

LED:
Delivered Lumens: 1,611 (Clear Array Lens)
CRI: 80+
CCT: 4000K, 5000K
Aluminum Boards

Wattage:
Array: 16.6w, System: 19.7w

Driver:
Dimmable Electronic Driver, 120-277V, 50/60Hz

Mounting:
Mounting Kit with 8" Anchor Bolts (Included).

Height: 43 1/8"
Weight: 20 lbs.

Listings & Ratings:
CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP67 Sealed LED Compartment.
Operating Temperatures: -20°C to +40°C

Options:
Surge Protection
Custom Colors Available Upon Request.

5-Year Warranty

Item	Wattage	Voltage	Kelvin	Lumens
BQRS-016-40-CA-U-X	16w	120-277v	4000K	1,740 lm
BQRS-016-50-CA-U-X	16w	120-277v	5000K	1,813 lm

Note: Includes Mounting kit with 8" anchor bolts)

PRODUCT ORDERING SELECTION

BQRS	016		CA	U		
Series BQRS	Wattage <input type="checkbox"/> 016 - 16 Watts	Kelvin <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	Lens <input type="checkbox"/> CA - Clear Array	Voltage <input type="checkbox"/> U - 120-277vAC	Body Color <input type="checkbox"/> Z - Bronze <input type="checkbox"/> B - Black <input type="checkbox"/> C - Custom	Options / Accessories <input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> GFCI - GFCI Outlet 15A, 120V <input type="checkbox"/> BRK - Universal Retrofit Base Kit





SQUARE DESIGNER BOLLARD with Reveal

BQRS


120 - 277vAC

MOUNTING




Universal Retrofit Base Kit
Fits all 7" and 4" bollards
#BRK

PHOTOMETRIC OUTPUT

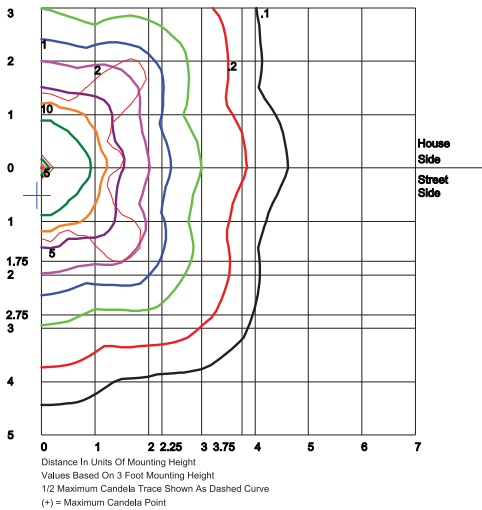

BQRS-016-40-CA-U-X

DIMENSIONS

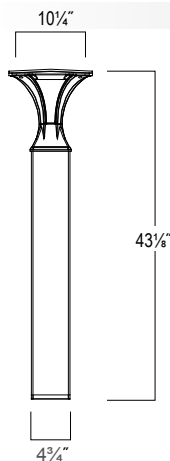

Specifications and data are subject to change without notice.

PRODUCT DESIGNATIONS

