



SQUARE BOLLARDS with Flat Top

BQSQ

120 - 277vAC



Type III
Type V

Square
Louvers

Cone
Reflector

Cat. #	Type
Notes	

DESIGNATIONS



IP67



KEY FEATURES AND BENEFITS

These durable, square flat topped LED Bollards are designed and produced to provide uniform ambient lighting while accenting any landscape or location.

This square bollard provides low glare to a wide area and compared to HID bollard lighting, is truly cost-effective pathway lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

Custom heights are available upon request.

SPECIFICATIONS

Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Internal Ballast Tray for Easy Maintenance.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750, IP65 Sealed LED Compartment.

Finish:

Textured Powdercoat Over Chromate Conversion Coating. Custom Colors Available Upon Request.

Styles:

IES Type III or V Clear Prismatic Borosilicate Glass Refractor, Specially Designed Aluminum Cone Reflector or Internal Louvers

Lens:

Clear Polycarbonate Vandal-Resistant Lens

LED: Aluminum Boards

Wattage: Array: 14.5w, System: 17w (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60H; 347V, 50/60H; Dimmable Driver

Mounting Options: Mounting Kit with 8-inch Anchor Bolts, Included.

Height: 41 3/8"

Weight: Type III & Type V - 24 lbs.
VRL - 22 lbs. / VCR - 21 lbs.

Operating Temperature: -40°C to +40°C

5-Year Warranty

Item	Wattage	Voltage	Kelvin	LUMENS			
				Type III	Type V	Louvers	Cone
BQSQ-015-30-X-U	15w	120-277v	3000K	1,101 lm	1,076 lm	744 lm	1,549 lm
BQSQ-015-40-X-U	15w	120-277v	4000K	1,195 lm	1,167 lm	807 lm	1,680 lm
BQSQ-015-50-X-U	15w	120-277v	5000K	1,245 lm	1,215 lm	841 lm	1,750 lm
BQSQ-015-AM-X-U	15w	120-277v	AMBER				

Note: Includes Mounting kit with 8" anchor bolts)

PRODUCT ORDERING SELECTION

BQSQ	015			U		
Series BQSQ	Wattage <input type="checkbox"/> 015 - 15 Watts	Kelvin <input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K <input type="checkbox"/> AM - Amber	Lens <input type="checkbox"/> III - Type III <input type="checkbox"/> V - Type V <input type="checkbox"/> VSL - Type V Square <input type="checkbox"/> VCS - Type V Cone	Voltage <input type="checkbox"/> U - 120-277vAC	Body Color <input type="checkbox"/> Z - Bronze (std) <input type="checkbox"/> B - Black <input type="checkbox"/> C - Custom	Options / Accessories <input type="checkbox"/> SF - Single Fuse <input type="checkbox"/> DF - Double Fuse <input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> GF1 - GFCI Outlet / 15A / 120vAC <input type="checkbox"/> BU - Battery Backup, 90 Minutes <input type="checkbox"/> BRK - Universal Retrofit Base Kit



LED

SQUARE BOLLARDS with Flat Top

BQSQ

120 - 277VAC

MOUNTING




Universal Retrofit Base Kit

Fits all 7" and 4" bollards


#BRK

PHOTOMETRIC OUTPUT


Type III

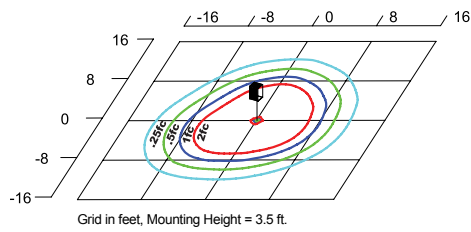


Type V

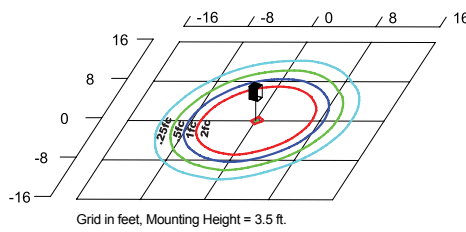

Cone Reflector

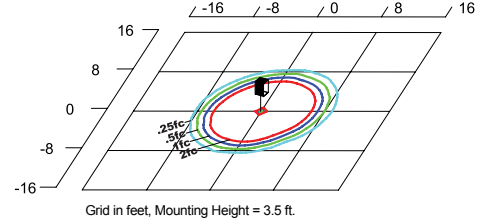

DIMENSIONS

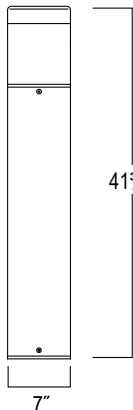

41 5/8" Custom Heights Available Upon Request.

Specifications and data are subject to change without notice.

PRODUCT DESIGNATIONS



IP67

