



The FLYER Series Hazardous Location Lighting

HJHL22 / HJHL42

100 - 277vAC / 200 - 480vAC

Cat. #	Type
Notes	

DESIGNATIONS



KEY FEATURES AND BENEFITS

- Class 1 Division 2 - Groups A, B, C, D (Flammable Gases & Vapors).
- Class 2 Division 1 - Groups E, F, G (Combustible Dusts).
- Class 2 Division 2 - Groups E, F, G (Combustible Dusts).
- Class 3 Divisions 1 & 2.
- Ambient temperature capabilities: -40°C to 60°C (140°F).
- Corrosion proof – Coated aluminum alloy (copper free) housing.
- Oven baked grey powdered nylon coating for increased corrosion resistance.
- Marine and wet location ready.

High Vibration
RESISTANCE

SPECIFICATIONS

NAME	The Flyer
Category	Hazardous Area Linear Lighting
Model #	HJHL
Voltage	100 - 277vAC or 200 - 480vAC
Ambient Temperatures	-40°C to 60°C (140°F)
T - Rating	T4
Housing	Coated Copper Free Aluminum Alloy
Color	Gray
Lens	Polycarbonate
Wattage	10w / 20w / 40w / 50w / 50w
Efficacy	140 lm/w
Lifetime	70,000 hr. at L70
CRI	>70 cool white
Beam Angle	120°
Power Factor	>0.95
Color Temp	4000 & 5000 Kelvin

Weight	2 ft - 8.2 lbs. / 4 ft - 11.3 lbs. lbs.
Dimensions	47.2" L x 4.7" W x 9.5" H 23.6" L x 4.7" W x 8.85" H
NPT	3/4"
Warranty	5-Year Limited

2 ft.	10w	1,400
2 ft.	20w	2,800
4 ft.	40w	5,600
4 ft.	50w	7,000
4 ft.	60w	8,000

PRODUCT ORDERING SELECTION

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="120"/>	<input type="text"/>
Series	Type-Watts	Kelvin	Voltage	Beam Angle	Mounting Options
HJHL22 - 2 ft	<input type="checkbox"/> 010 - 10 Watts (2 ft only)	<input type="checkbox"/> 40 - 4000K	<input type="checkbox"/> U -120 -277v	<input type="checkbox"/> 120 -120°	<input type="checkbox"/> HJUB - Universal Yoke Bracket
HJHL42 - 4 ft	<input type="checkbox"/> 020 - 20 Watts (2 ft only)	<input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> 48 -200 -480v		<input type="checkbox"/> HJPP - Pendant Pipe
	<input type="checkbox"/> 040 - 40 Watts (2 ft & 4 ft)				
	<input type="checkbox"/> 050 - 50 Watts (4 ft only)				
	<input type="checkbox"/> 060 - 60 Watts (4 ft only)				



LED

LINEAR
hazloc

SOLAS RAY™ LIGHTING

5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

The FLYER Series HazLoc


HJHL22 / HJHL42

100 - 277vAC / 200 - 480vAC


MOUNTING



Pendant Pipe - #HJPP

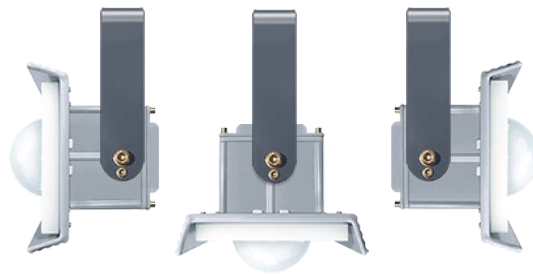




Universal Bracket - #HJUB
Ceiling Mount

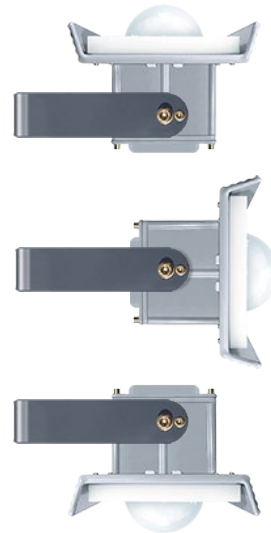




Universal Bracket - #HJUB
Wall Mount

DIMENSIONS

HJHL22 (2 ft)

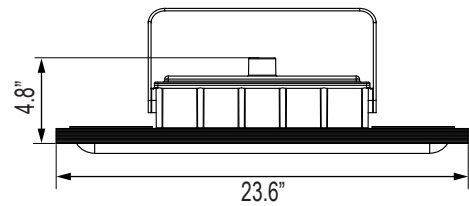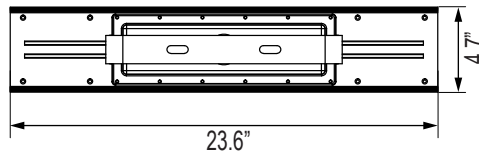

HJHL42 (4 ft)

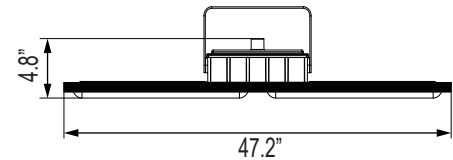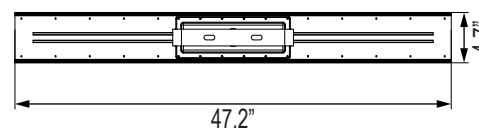

PRODUCT DESIGNATIONS



Learn More About Class / Division with a Button Click.



Specifications and data are subject to change without notice.