

The CHALLENGER SHL Series Linear Lighting

SHL4 / SHL8

120 - 277vAC

Cat. #	Type
Notes	

DESIGNATIONS



KEY FEATURES AND BENEFITS

- Precision Angled LED Arrays establish exact light distribution.
- Diffused Polycarbonate Lenses eliminate glare and hot spots.
- Extruded Aluminum Housing, Sealed and Lead-Free.
- Low Profile Fixture Body expands mounting possibilities.
- Color-Coded End Caps for immediate fixture identification.
- Quick Visual Identification.
- Resists Dust & Insect Intrusion.
- Lightweight and Easy to Install
- No 60 Cycle Hum




SHL4 - 4 ft.



SHL8 - 8 ft.

SPECIFICATIONS

Name	The Challenger SH
Category	Retail / Commercial Linear Lighting
Model	SHL4 / SHL8
Color	White with Black end caps
Housing	Aluminum Alloy
Voltage	120-277vAC
Ambient Temperature	14°F to 104°F
Lens	Polycarbonate
Beam Angle	180°
Wattage	74w / 100w
Lumens	SHL4 - 8,880 lm / SHL8 - 12,000 lm
Efficacy	121 Lumens per Watt
Lifetime	50,000 hr. at L ₈₀
CRI	Ra≥80
Power Factor	>0.90
Color Temp	5000K Kelvin
Warranty	5-Year Limited

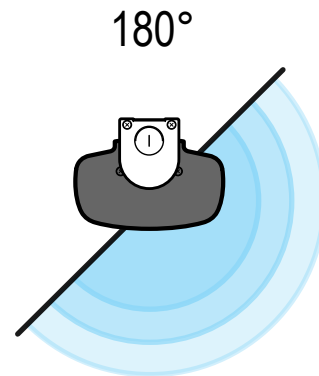

PRODUCT ORDERING SELECTION

SHL series 4'

SHL4B2432NU50

SHL series 8'

SHL8B3432NU50

The CHALLENGER SHL Series Linears

SHL4 / SHL8

120 - 277VAC


MOUNTING AND OPTIONS

All CHALLENGER fixtures have a knockout grouping less than 24" apart. Mounting can be surface mount, chain, cable or all-thread.




Challenger SD shown.

Knockouts & Hanging Holes

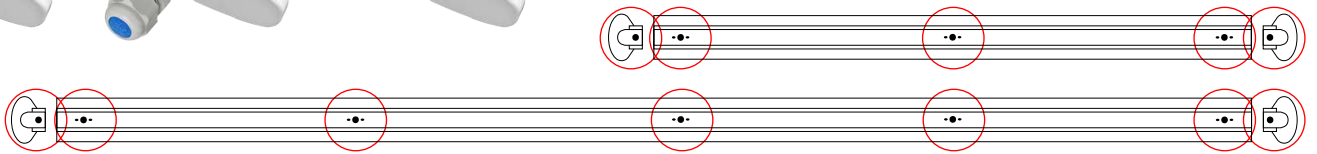

MORE AVAILABLE CHALLENGERS

135°




SD series 4'

□ SD4B4808DU50

SD series 8'

□ SD8B4815NU50

275°




SH Series 4'

□ SH4B3432NU50

SH series 8'

□ SH8B2465NU50

120°




ST series 4'

□ ST4B3208DU50

ST series 8'

□ ST8B3215DU50

DIMENSIONS

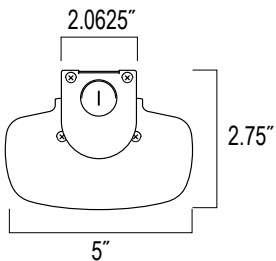

WEIGHT RANGES:

4 ft. 5.73 lbs.
8 ft. 11.6 lbs.

