

# BQ9 Series

## The EASY CURVE™

Designer Bollard



Cat. #	Type
Notes	

### CERTIFICATIONS / RATINGS



**IP65**

CERTIFIED  
**UL 1598**

**UL 8750**  
LED SAFETY

### KEY FEATURES AND BENEFITS

These uniquely stylized LED Bollards are designed using LED technology and provide uniform lighting while accenting any landscape. This bollard provides low glare and highly cost-effective pathway lighting.

Solas Ray™ Designer Bollards become the featured addition to illuminate and accent landscaping, walkways, buildings, hospitals, office buildings, schools and parking areas. Anywhere security, visibility and safety is needed, ask for quality, demand performance and expect reliability from Solas Ray™ bollards.

### SPECIFICATIONS

<b>Voltage</b>	120-277vAC
<b>Wattage</b>	12w (13.6w system) / 18w (20.4w system)
<b>Color Temp</b>	3000 / 4000 / 5000 Kelvin
<b>Housing</b>	Durable one-piece sand cast aluminum housing with 1/2" thick walls. Includes flush mounting base & vandal-resistant screws, internal driver tray for easy maintenance.
<b>Color</b>	Textured architectural bronze or black powder coat finish over a chromate conversion coating. Custom colors available upon request.
<b>Lens</b>	Clear UV-Stabilized Polycarbonate Vandal-Resistant
<b>Optics</b>	Type III
<b>Lifetime</b>	147,000 hrs L70
<b>Ambient Temperature</b>	-40°C (-40°F) to 50°C (122°F)
<b>Protection</b>	IP65
<b>Warranty</b>	5 Year Limited Warranty




#### Universal Retrofit Base Kit

Fits all 7" and 4" bollards

Part Number: BRK

### DIMENSIONS

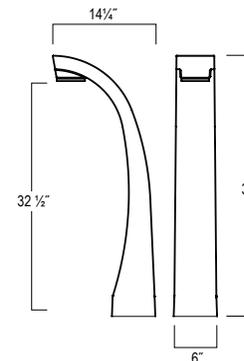

Custom heights available upon request.

### LUMENS

Wattage	Kelvin	Lumens	Wattage	Kelvin	Lumens
12w	3000K	1,427	18w	3000K	2,140
	4000K	1,548		4000K	2,322
	5000K	1,612		5000K	2,418

### PRODUCT ORDERING SELECTION

<b>BQ9</b>	-	-	-	<b>C</b>	-	<b>U</b>	-	-	-
<b>Series</b>	<b>Watts</b>	<b>Kelvin</b>	<b>Lens</b>	<b>Voltage</b>	<b>Body Color</b>	<b>Options / Accessories</b>			
<input checked="" type="checkbox"/> BQ9	<input type="checkbox"/> 012 - 12w <input type="checkbox"/> 018 - 18w	<input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input checked="" type="checkbox"/> C - Clear UV Stabilized Polycarbonate	<input checked="" type="checkbox"/> U - 120-277vAC	<input type="checkbox"/> Z - Bronze <input type="checkbox"/> B - Black <input type="checkbox"/> C - Custom	<input type="checkbox"/> SP - Surge Protection <input type="checkbox"/> GFCI - GFCI Outlet 15A, 120V <input type="checkbox"/> BRK - Universal Retrofit Base Kit <input type="checkbox"/> SF - Single Fuse <input type="checkbox"/> DF - Double Fuse			