

HJVX Series

Emergency Exit Sign

Hazardous Location LED Lighting



High Vibration
RESISTANCE

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D
- Class II, Div 1, Groups E, F, G
- Class II, Div 2, Groups F, G
- Class III

KEY FEATURES AND BENEFITS

- Compact and heavy duty emergency sign with battery backup.
- Economical single sided design (lettering is reversed on back side).
- 3-hour emergency operation.
- Aluminum housing with tempered glass exit sign.
- Stainless steel exposed fasteners.
- Available with red or green lettering.
- IP66 rating.
- Integrated junction box for driver and emergency battery.
- Low energy consumption.
- High vibration and impact resistance.

SPECIFICATIONS

Voltage	100-277 VAC
Wattage	5W
Sign Color	Red or Green
Housing	Aluminum
Sign	Tempered glass
Lifetime	50,000 hrs
Ambient Temperature	-20°C(-4°F) to 60°C(140°F)
Protection	IP66
Battery Runtime	180 minutes
Warranty	5 Year Limited Warranty




Test button located on end-cap.

Aluminum housing with stainless steel external hardware.

PRODUCT ORDERING SELECTION


HJVX	05			
Series	Watts	Letter Color	Arrows	Mounting Options
<input checked="" type="checkbox"/> HJVX	<input checked="" type="checkbox"/> 05 - 5 Watts	<input type="checkbox"/> R - Red <input type="checkbox"/> G - Green	<input type="checkbox"/> N - None <input type="checkbox"/> B - Both <input type="checkbox"/> L - Left <input type="checkbox"/> R - Right	<input type="checkbox"/> PM - Pendant Mount <input type="checkbox"/> WM - Wall Mount <input type="checkbox"/> SM - Side Pipe Mount

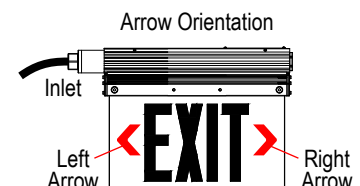

HJVX Series

Emergency Exit Sign

MOUNTING OPTIONS

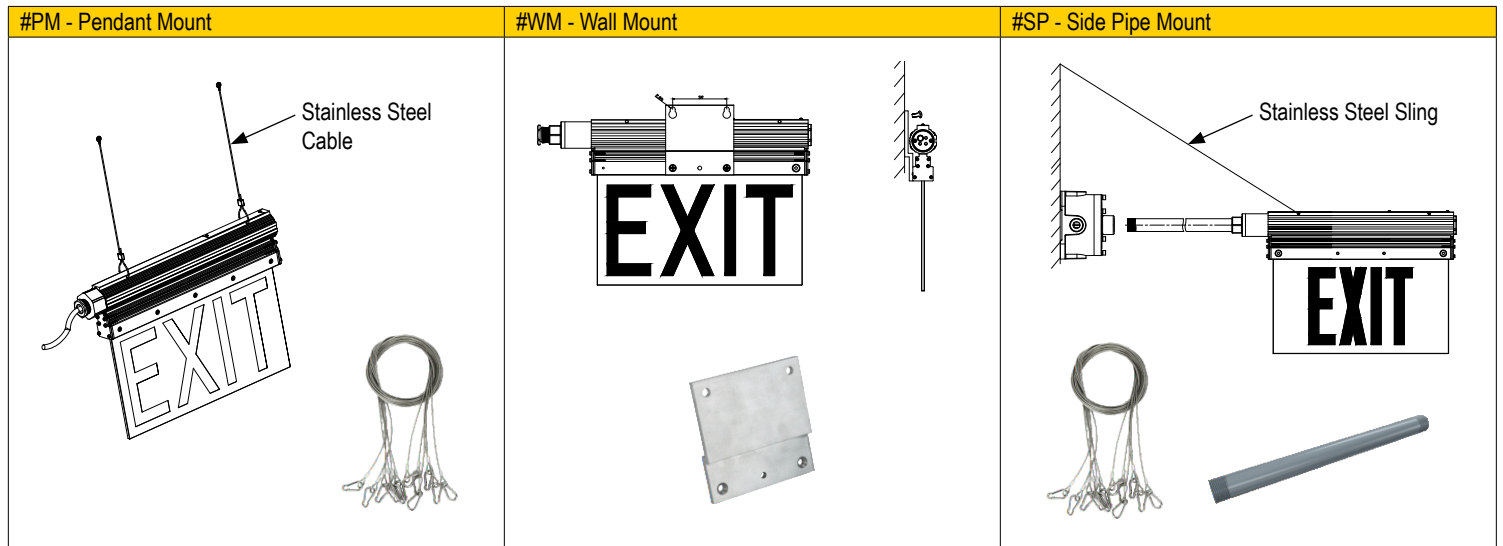

WEIGHTS AND DIMENSIONS

Weight
7.28 lb

