


HL Series

The HazLoc MINI Beast™

Hazardous Location Lighting

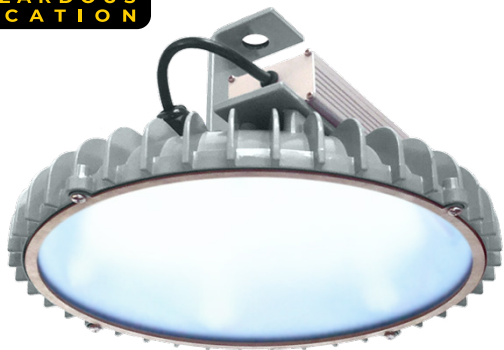

5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



IP66

CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D
- Class II, Div 2, Groups F, G

KEY FEATURES AND BENEFITS

- 14" diameter design delivers optimal light output to large surface areas.
- Ambient temperature capabilities: -40° C to 65° C (149°F).
- Passive cooling radiator design for high temperature applications / locations.
- Corrosion proof – coated aluminum alloy housing.
- Gray nylon corrosion resistant powder coat.
- Angle mounted COB LEDs for high efficacy and lighting in all directions.
- Proprietary silicone based potting compound used in driver for effective thermal conduction away from components.

SPECIFICATIONS

Voltage	120-277vAC / 277-480vAC
Wattage	49w / 104w / 129w
Color Temp	5000 (Standard) / 4000 Kelvin
Housing	Die-cast aluminum
Color	Gray
Coating	Corrosion resistant nylon powder-coat
Lens	Flat tempered glass
Beam Angle	150°
T-Rating	T5
Protection	IP66

Ambient Temperature	-40°C (-40°F) to 65°C (149°F)
NPT	3/4"
Lifetime	100,000 hrs L70
CRI	> 70
Power Factor	> 0.95
Warranty	5 Year Limited Warranty

LUMENS / EFFICACY

49w	104w	129w
6,100 lm	13,800 lm	16,700 lm
118 lm/w	125 lm/w	130 lm/w

PRODUCT ORDERING SELECTION

		EX		GR		
Series/Watts	Kelvin	Driver	Voltage	Color	Mounting Options	Other Options
☐ HL06-049 (49w)	☐ 50 - 5000K (standard)	☒ EX - Ext.	☐ U - 120-277vAC	☒ GR - Gray	☐ PM3 - Pendant Mount 3"	☐ C5 - 5 Ft. Safety Cable
☐ HL12-104 (104w)			☐ 48 - 277-480vAC		☐ PM6 - Pendant Mount 6"	☐ C10 - 10 Ft. Safety Cable
☐ HL16-129 (129w)	☐ 40 - 4000K				☐ PM12 - Pendant Mount 12"	
					☐ PM18 - Pendant Mount 18"	
					☐ PM24 - Pendant Mount 24"	
					☐ PHS - Pendant w/ Safety Hook	
					☐ WMB - Wall Mount Bracket	


HL Series

The HazLoc MINI Beast™



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com


The Beast™ features the perfect combination of LEDs, positioning, power, reflectivity and more to provide superior benefits and unique advantages over other hazardous location industrial bay lighting.

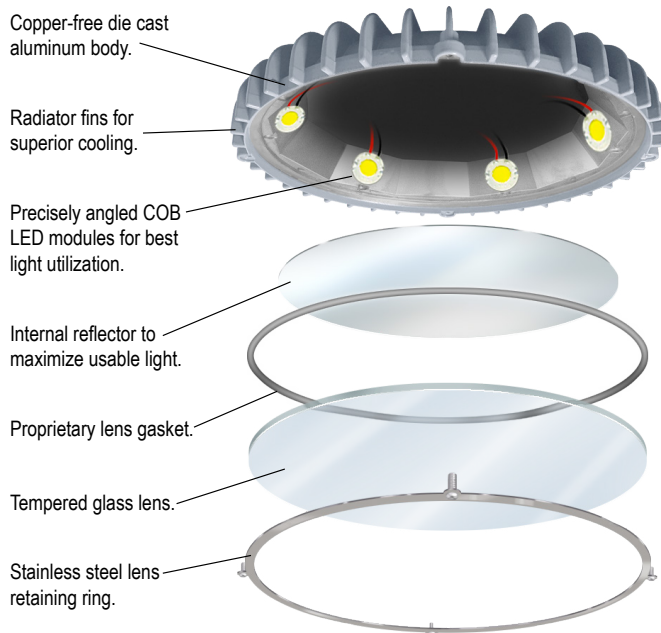

MOUNTING OPTIONS

#PM(X) - Pendant Mount	#PHS - Pendant w/ Safety Hook
3" / 6" / 12" / 18" / 24" lengths available. 	
#WMB - Wall Mount Bracket	
	

3/4" NPT "C" bracket included standard.

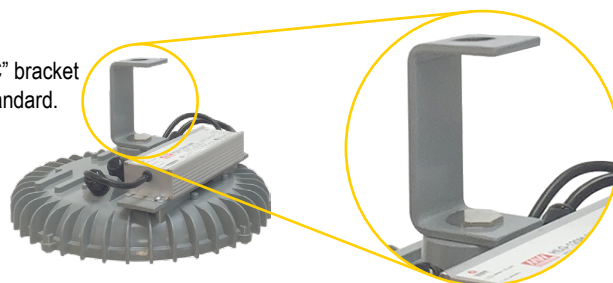

WEIGHTS AND DIMENSIONS

WEIGHT

20 lb

