

# BQFT Series

## Round Flat Top Bollards

LED Outdoor Lighting

Cat. #	Type
Notes	



Type III  
Type V



Round  
Louvers



Cone  
Reflector

### CERTIFICATIONS / RATINGS



**IP65**

CERTIFIED  
**UL 1598**

**UL 8750**  
LED SAFETY

### KEY FEATURES AND BENEFITS

These durable, extruded aluminum flat topped LED Bollards are designed and produced to provide uniform ambient lighting while accenting any landscape or location.

They provide low glare to a wide area and compared to HID bollard lighting, are a truly cost-effective pathway lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

- Includes mounting kit with 8" anchor bolts.
- Custom heights and colors are available upon request.
- 0-10V dimming driver.
- Buy American Act compliant.



### SPECIFICATIONS

<b>Voltage</b>	120-277 VAC
<b>Wattage</b>	10W / 15W / 22W
<b>Color Temp</b>	3000 / 4000 / 5000 Kelvin
<b>Housing</b>	Extruded aluminum housing with flush mounting base & vandal-resistant screws.
<b>Finish</b>	Powder-coat finish over chromate conversion coating.
<b>Color</b>	Architectural bronze / black / custom
<b>Lens</b>	Type III / Type V / Type V Louvers / Type V Cone
<b>Lifetime</b>	147,000 hrs L70
<b>Ambient Temperature</b>	-40°C (-40°F) to 50°C (122°F)
<b>Protection</b>	IP65
<b>Warranty</b>	5 Year Limited Warranty

### LUMENS

Lens	Kelvin	10W	15W	22W
Type III	3000K	787 lm	1,101 lm	1,652 lm
	4000K	853 lm	1,195 lm	1,792 lm
	5000K	889 lm	1,245 lm	1,867 lm
Type V	3000K	768 lm	1,076 lm	1,613 lm
	4000K	833 lm	1,167 lm	1,750 lm
	5000K	868 lm	1,215 lm	1,823 lm
Type V Louvers	3000K	531 lm	744 lm	1,116 lm
	4000K	576 lm	807 lm	1,211 lm
	5000K	600 lm	841 lm	1,261 lm
Type V Cone	3000K	1,037 lm	1,452 lm	2,178 lm
	4000K	1,125 lm	1,575 lm	2,362 lm
	5000K	1,172 lm	1,641 lm	2,461 lm

### PRODUCT ORDERING SELECTION

**BQFT** - [ ] - [ ] - [ ] - **U** - [ ] - [ ]

- |   |  |  |  |  |   |  |
|---|--|--|--|--|---|--|
| <b>Series</b><br><input checked="" type="checkbox"/> BQFT | <b>Watts</b><br><input type="checkbox"/> 010 - 10W<br><input type="checkbox"/> 015 - 15W<br><input type="checkbox"/> 022 - 22W | <b>Kelvin</b><br><input type="checkbox"/> 30 - 3000K<br><input type="checkbox"/> 40 - 4000K<br><input type="checkbox"/> 50 - 5000K | <b>Lens</b><br><input type="checkbox"/> III - Type III<br><input type="checkbox"/> V - Type V<br><input type="checkbox"/> VRL - Type V Louvers<br><input type="checkbox"/> VCR - Type V Cone | <b>Voltage</b><br><input checked="" type="checkbox"/> U - 120-277VAC | <b>Body Color</b><br><input type="checkbox"/> Z - Bronze<br><input type="checkbox"/> B - Black<br><input type="checkbox"/> C - Custom | <b>Options / Accessories</b><br><input type="checkbox"/> SF - Single Fuse<br><input type="checkbox"/> DF - Double Fuse<br><input type="checkbox"/> SP - Surge Protection<br><input type="checkbox"/> GF1 - GFCI Outlet 15A, 120V<br><input type="checkbox"/> BU - Battery Backup, 90 Minutes<br><input type="checkbox"/> BRK - Universal Retrofit Base Kit |
|---|--|--|--|--|---|--|

# BQFT Series

## Round FLAT Top Bollards

### OPTIONS / ACCESSORIES






#### Universal Retrofit Base Kit

Fits all 7" and 4" bollards  
Part Number: BRK

### BUG (Backlight / Uplight / Glare) Rating

Lens	Wattage	B (Back)	U (Up)	G (Glare)
Type III	10W	1	3	1
	15W	1	3	1
	22W	1	3	1
Type V	10W	1	3	1
	15W	1	3	1
	22W	1	3	1
Type V Louvers	10W	0	2	0
	15W	1	2	1
	22W	1	3	1
Type V Cone	10W	1	3	1
	15W	1	3	1
	22W	1	3	1


### PHOTOMETRIC OUTPUT

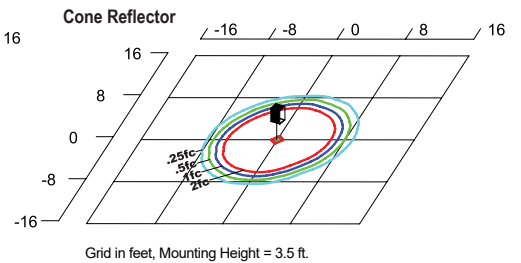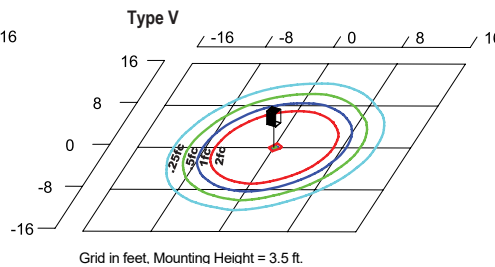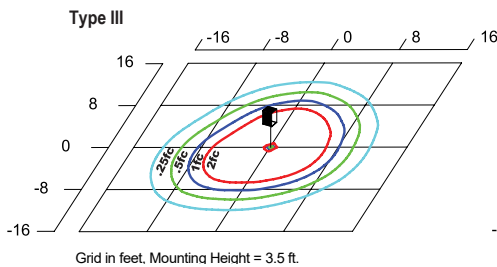

### WEIGHTS AND DIMENSIONS

#### WEIGHTS

Lens	lb.
Type III	22 lb.
Type V	22 lb.
Type V Louvers	20 lb.
Type V Cone	19 lb.

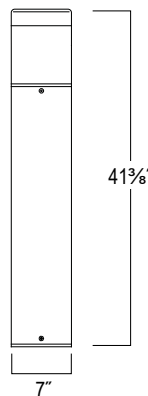

Custom heights available upon request.