TSC Series

The TRACER™ SC

Hazardous Location LED Lighting



SPECIFICATIONS

Voltage	120-277 VAC
Wattage	10W / 20W / 40W
Color Temp	1800 Kelvin (Yellow)* / 590nm
Housing	Aluminum Alloy
Color	Gray
Lens	Glass Tubes
Lifetime	60,000 hrs L70
Beam Angles	110°
Ambient Temperature	-20°C (-4°F) to 40°C (104°F)
T-Rating	Т6
Power Factor	$\cos \ge 0.9$
Protection	IP67 / NEMA 6
Warranty	5 Year Limited Warranty

* Also available in 3000K, 4000K, 5000K, 6500K. Consult factory for availability and lead times.

LUMI	ENS			
1X2	10W	1X4 20W	2X2 20W	2X4 40W
45	50	900	900	1,800

PRODUCT ORDERING SELECTION

TSC	_	-
Series	Tubes/Length	Watts
⊠ TSC	□ 1X2 - 1 Tube x 2ft	🗆 010 - 10W
	🗆 1X4 - 1 Tube x 4ft	🗆 020 - 20W
	🗆 2X2 - 2 Tubes x 2ft	🗆 020 - 20W
7.24 SI-06912	🗆 2X4 - 2 Tubes x 4ft	□ 040 - 40W

Solas Ray[™]LIGHTING

5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #

Туре

CERTIFICATIONS / RATINGS




CLASS / DIVISION

• Class I, Div 1, Groups C, D

• Class II, Div 1, Groups E, F, G

KEY FEATURES AND BENEFITS

- Narrow band yellow light (590nm / blocks UV wavelengths under 500nm) designed for use in semiconductor manufacturing, laboratories, health care facilities, pharmaceutical labs, and other applications where UV light would be damaging.
- Available as a single tube or dual tube configuration in 2ft or 4ft lengths.
- · Heavy duty aluminum housing.
- Wall, ceiling or pendant mounting options available.
- Includes protective wire guard.

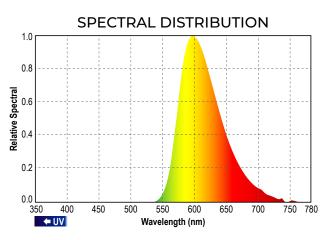



590nm yellow light designed to not damage UV sensitive materials.

	_	- Y -	- U	-
h	Watts	Color Temp	Voltage	Mounting Options
ıbe x 2ft	🗆 010 - 10W	🗹 Y - Yellow (1800K)*	🗹 U - 120-277 VAC	CWM - Ceiling / Wall Mount Brackets
bo v /ft				PM - Pendant Mount


TSC Series The TRACER™ SC



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com



MOUNTING OPTIONS

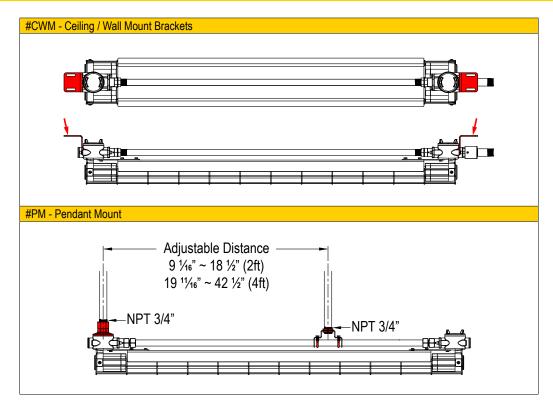

WEIGHTS AND DIMENSIONS

