

WWS Series

WALL PACK

Selectable Semi Cut-Off



SELECTABLE

COLOR TEMPERATURE & POWER

SPECIFICATIONS

Voltage	120-277VAC
Wattage	Selectable 30W / 45W / 60W / 70W
Color Temp	Selectable 3000 / 4000 / 5000 Kelvin
Housing	Cast aluminum
Lens	Glass
Efficacy	Up to 125 lm/W
CRI	70
Power Factor	0.95
Driver Efficacy	90%
Beam Angle	97° x 70°
Life Span	75,000 hrs
Ambient Temperature	-30°C (-22°F) to 45°C (113°F)
Warranty	5 Year Limited Warranty

LUMENS

Setting	30w	45w	60w	70w
Lumens	4,483	5,896	7,636	8,776

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



KEY FEATURES AND BENEFITS

- Field adjustable wattage 30w / 45w / 60w / 70w.
- Field adjustable color temperature 3000K / 4000K / 5000K.
- Photocell included standard - comes with cover for non-photocell operation.
- Excellent optics for greatly improved light utilization and even distribution.
- High efficiency LED (up to 125 lm/w).
- Long life (75,000 hrs).
- 1-10V dimming.



Wattage and color temp. controls.

Included photocell




Included photocell cover



WEIGHTS AND DIMENSIONS

Weight
6.88 lbs

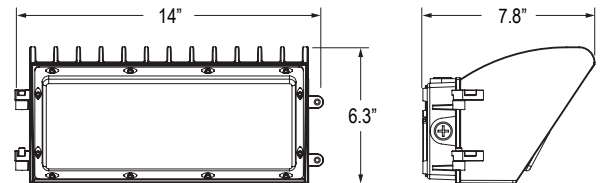

PRODUCT ORDERING SELECTION

WWS	-	34567	-	345K	-	U	-	Z	-	P	-	
Series		Watts		Kelvin		Voltage		Body Color		Photocell		Optional Emergency Backup
<input checked="" type="checkbox"/> WWS		<input checked="" type="checkbox"/> 34567 - Selectable (30W / 45W / 60W / 70W)		<input checked="" type="checkbox"/> 345K - Selectable (3000K / 4000K / 5000K)		<input checked="" type="checkbox"/> U - 120-277 vAC		<input checked="" type="checkbox"/> Z - Bronze		<input checked="" type="checkbox"/> P - Photocell (standard)		<input type="checkbox"/> BLD-8 - 8W Emergency Backup <input type="checkbox"/> BLD-15 - 15W Emergency Backup