



HTL3 Series

The KEEPER 3™

Hazardous Location LED Lighting



SPECIFICATIONS

Voltage	120 - 277 VAC
Wattage W/O Battery	80W / 100W / 120W / 135W / 150W / 165W / 180W / 200W
Wattage With Battery	140W / 155W / 170W
Color Temp	3000 / 5000 Kelvin
Housing	Aluminum Alloy
Color	Gray
Lens	Tempered glass
Ambient Temperature	-20°C (-4°F) to 40°C (104°F)
T-Rating	T5
Lifetime	60,000 hrs L70
CRI	≥ 80 (3000K) / ≥70 (5000K)
Beam Angles	X-116° / Y-114°
Power Factor	cos ≥ 0.9
Protection	IP67 / NEMA 6
Entrance Thread	1 x 3/4"
Warranty	5 Year Limited Warranty



5935 West 84th St. | Indianapolis, IN 46278 | 1-800-840-5635 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS



CLASS / DIVISION

• Class I, Div 1, Groups B, C, D

KEY FEATURES AND BENEFITS

- Class I, Division 1 hazardous rated linear fixture.
- Up to 120 minute integrated emergency battery backup available.
- 2 or 3 window design.
- Durable aluminum alloy enclosure with tempered glass lenses.
- IP67 and Nema 6 rated.
- Trade Agreement Act Compliant



BATTERY SPECIFICATIONS

Charging Time	EM Mode Illumination Time	EM Mode Output Watts
120 min	120 min.	60W (Single Window Illuminates)

LUMENS

Kelvin	80W	100W	120W	135W
3000K	10,400	13,000	15,600	17,550
5000K	11,200	14,000	16,800	18,900

Kelvin	150W	165W	180W	200W
3000K	19,500	21,450	23,400	26,000
5000K	21,000	23,100	25,200	28,000

LUMENS (Battery Equipped Models)

Kelvin	140W	155W	170W
3000K	18,200	20,150	22,100
5000K	19,600	21,700	23,800

PRODUCT ORDERING SELECTION

HTL3 - [] - [] - U - []

Series/Length
 HTL3

- Watts / Windows / Battery**
- 080 - 80W - 2 Windows
 - 100 - 100W - 2 Windows
 - 120 - 120W - 2 Windows
 - 135 - 135W - 3 Windows
 - 150 - 150W - 3 Windows
 - 165 - 165W - 3 Windows
 - 180 - 180W - 3 Windows
 - 200 - 200W - 3 Windows

Kelvin

- 30 - 3000K
- 50 - 5000K

Voltage

- U - 120-277VAC

Mounting Options

- CM - Ceiling Mount
- HG - Hanging Mount
- WM - Wall Mount




- 140B - 140W - 3 Windows - 120 min Battery
- 155B - 155W - 3 Windows - 120 min Battery
- 170B - 170W - 3 Windows - 120 min Battery

HTL3 Series




The KEEPER 3™

MOUNTING OPTIONS




#CM - Ceiling Mount

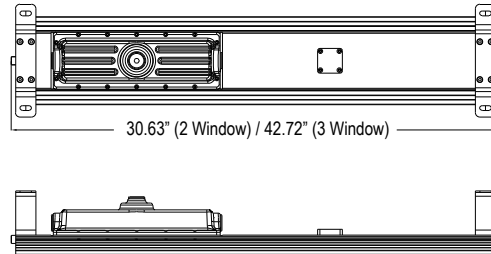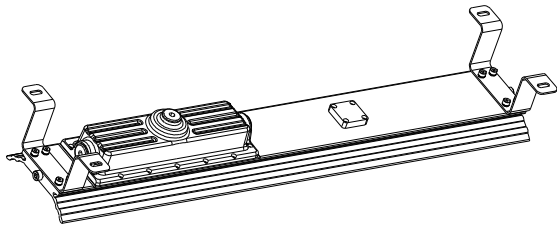

#HG - Hanging Mount

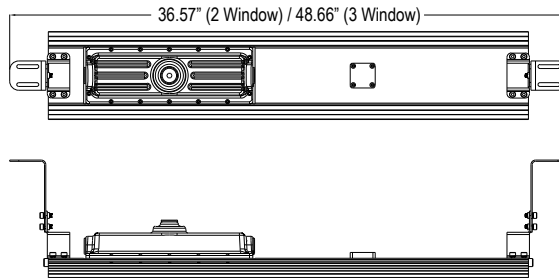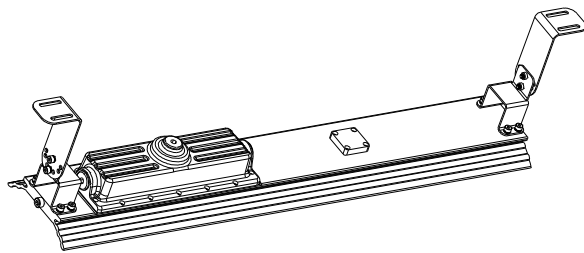

#WM - Wall Mount

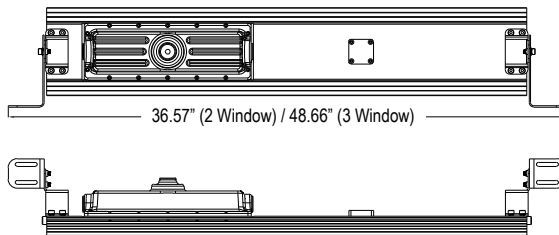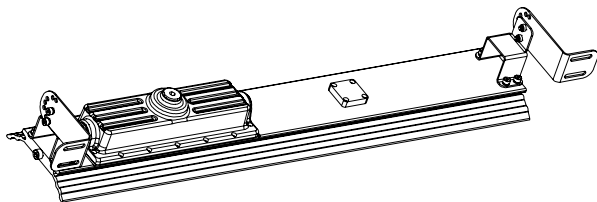


WEIGHTS AND DIMENSIONS

WEIGHTS

Configuration	lbs
2 Windows	25.4 lb
3 Windows	33.7 lb
w/ EM Battery	37.7 lb

2 WINDOW MODELS

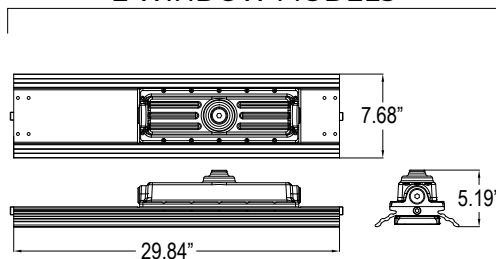

3 WINDOW MODELS

